

Mini box type 2

Thin-wall heat shrink tubing / flexible / flame retardant / 3:1 / H-2(3X)

Features:

- Crosslinked Polyolefin
- Shrink ratio: 3:1
- Flame retardant
- General purpose
- High flexibility

Approvals:


- UL224 125 °C VW-1 600 V file E204071
- CSA file no.: 1934614
- Meets: RoHS, Sony-SS-00259

Application:

- Operating temperature: -55 °C to +125 °C
- Minimum shrink temperature: +70 °C
- Minimum full recovery temperature: +100 °C
- Longitudinal change: 0 ± 10% max.

Order information:

- Color: black

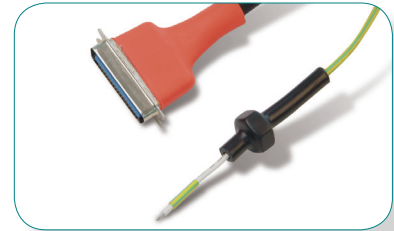

Type / Size	As supplied: inside diameter in mm (min.)	After recovery: inside diameter in mm (max.)	After recovery: wall thickness in mm (min.)	Box / Meter
H-2(3X) 1,5/0,5	1,5	0,5	0,45	10
H-2(3X) 3,0/1,0	3,0	1,0	0,55	10
H-2(3X) 4,5/1,5	4,8	1,5	0,60	10
H-2(3X) 6,0/2,0	6,4	2,0	0,65	10
H-2(3X) 9,0/3,0	9,5	3,0	0,75	5
H-2(3X) 12,0/4,0	12,7	4,0	0,80	5
H-2(3X) 18,0/6,0	19,1	6,0	0,90	5
H-2(3X) 24,0/8,0	25,4	8,0	1,00	5